

Meyer Burger White

380 – 400 Wp

For higher energy yield over the same area:
Heterojunction high-performance solar module
with SmartWire Connection Technology (SWCT™).



Made in Germany. Designed in Switzerland.

Production and development according to the highest quality standards.



Highly profitable

More energy yield over the same area even on cloudy or hot days.



Extremely durable

Outstanding cell stability and high breakage resistance thanks to patented SmartWire Connection Technology.



Consistently sustainable

Regional value creation, made without lead and produced using 100% renewable energy.




Guaranteed reliability

Industry-leading 25-year product and performance warranty.



Extremely aesthetic

Elegant Swiss design suitable for all roof shapes and sophisticated architecture.

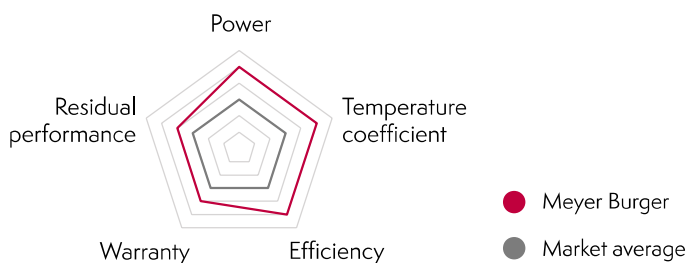

Residential rooftop




Commercial rooftop


Mechanical specification

Dimensions [mm]	1767 x 1041 x 35
Weight [kg]	19.7
Front cover	Tempered solar glass, 3.2 mm, with anti-reflective surface
Back cover	White water-barrier backsheet
Frame	Black anodized aluminum
Solar cell type	120 half-cells, mono n-Si, HJT with SWCT™
Junction boxes	3 diodes, IP68 rated in accordance with IEC 62790
Cable	PV cable 4 mm ² , 1.2 m length in accordance with EN 50618
Connectors	MC4/MC4-Evo2 in accordance with IEC 62852, IP68 rated only when connected

Packages



Delivery by container or truck. For truck freight, 0.78 loading meters per pallet and stacking factor 2 apply.

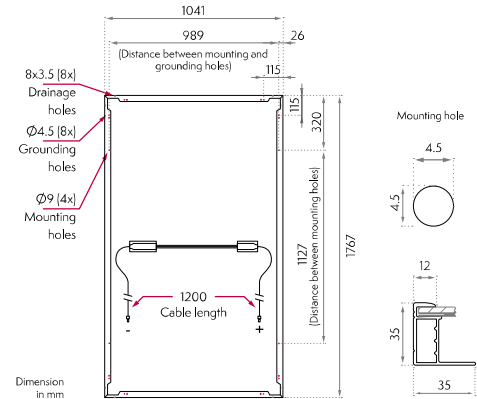

Electrical specification¹


Power class in STC ²	380		385		390		395		400			
Minimum performance [power tolerance -0 W/+5 W]	STC	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT		
Power at MPP	P_{MPP}	[W]	380	291	385	294	390	299	395	301	400	306
Short circuit current	I_{sc}	[A]	10.8	8.7	10.9	8.8	10.9	8.8	11.0	8.9	11.1	9.0
Open circuit voltage	V_{oc}	[V]	44.4	41.8	44.5	41.9	44.5	41.9	44.6	42.0	44.7	42.1
Current at MPP	I_{MPP}	[A]	10.3	8.3	10.3	8.3	10.4	8.4	10.4	8.4	10.5	8.5
Voltage at MPP	V_{MPP}	[V]	37.2	35.1	37.6	35.4	37.8	35.6	38.0	35.8	38.2	36.0
Efficiency	η	[%]	20.7		20.9		21.2		21.5		21.7	

Temperature coefficients

Temperature coefficient of I_{sc}	α	[%/K]	+0.033
Temperature coefficient of V_{oc}	β	[%/K]	-0.234
Temperature coefficient of P_{MPP}	γ	[%/K]	-0.259
Nominal Module Operating Temperature	NMOT ³	[°C]	44±2

The temperature coefficients stated are linear values.


I-V curves at different irradiances

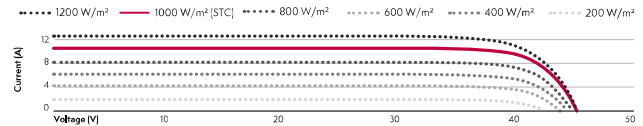

Properties for system design

Max. system voltage	[V]	1000
Overcurrent protection rating	[A]	20
Max. test load +/- (safety factor for test load = 1.5)	[Pa]	6000/4000
Max. design load +/-	[Pa]	4000/2666
Safety class		II
Fire type (UL 61730)		4
Fire class (EN 13501-1 / DIN 4102-1)		E/B2
Operation temperature	[°C]	-40 to +85

Meyer Burger warranty

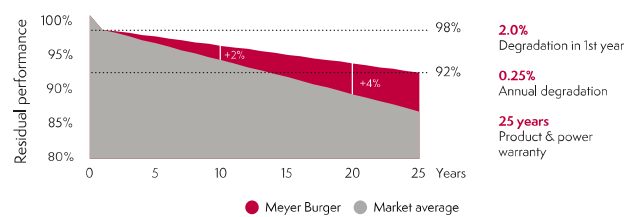

Certificates

Certification

IEC 61215:2016, IEC 61730:2016, UL 61730-1, UL 61730-2, PID (IEC 62804)

Certification (pending)

Salt Mist (IEC 61701), Ammonia Resistance (IEC 62716), Dust & Sand (IEC 60068)

Notice: All data and specifications are preliminary and subject to change without notice.

Visit us at meyerburger.com

Test procedure according to IEC standard

Market standard **1x IEC**

Meyer Burger materials testing **3x IEC**

¹ Measurement according to IEC 60904-3, measurement tolerance: ±3%
² STC: Irradiance 1000 W/m², module temperature 25°C, AM1.5G Spectrum
³ NMOT: Nominal Module Operating Temperature, with irradiance 800 W/m², AM1.5G spectrum, ambient temperature 20°C